

9-22-00

A

09/21/00  
JCS613 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL

(New Nonprovisional Applications Under 37 CFR § 1.53(b))

Attorney Docket No.

GP-300180

(Our Case No.2750/10)

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is the patent application of inventor(s) DONALD B. NAGY entitled METHOD AND SYSTEM OF SIMULATING A COLD OR HOT START AUTOMOBILE EMISSIONS TEST, for a(n):

- ( X ) Original Patent Application.
- ( ) Continuing Application (prior application not abandoned):
  - ( ) Continuation ( ) Divisional ( ) Continuation-in-part (CIP) ( ) Regular Filing of Provisional of prior Application Serial No. \_\_\_\_\_ filed on \_\_\_\_\_.
  - ( ) A statement claiming priority under 35 USC § 120 has been added to the specification.

Enclosed are:

- ( X ) Specification; 19 Total Pages (including title page) ( X ) Drawing(s); 2 Total Sheet(s).
- ( X ) Oath or Declaration:
  - ( ) A Newly Executed Combined Declaration and Power of Attorney:
    - ( ) Signed. ( ) Unsigned. ( ) Partially Signed.
  - ( ) A Copy from a Prior Application for Continuation/Divisional (37 CFR § 1.63(d)).
    - ( ) Incorporation by Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated herein by reference.
    - ( ) Signed Statement Deleting Inventor(s) Named in the Prior Application. (37 CFR § 163(d)(2)).
  - ( ) Power of Attorney. ( x ) Return Receipt Postcard.
  - ( ) Associate Power of Attorney. ( ) A Check in the amount of \$ \_\_\_\_\_ for the Filing Fee.
  - ( ) Preliminary Amendment. ( ) Information Disclosure Statement and Form PTO-1449.
  - ( ) A Certified Copy of Priority Documents (if foreign priority is claimed).
  - ( ) Statement(s) of Status as a Small Entity.
  - ( ) Copy, Statement(s) of Status as a Small Entity filed in prior application (status still proper and desired).
  - ( X ) Other: Assignment Cover Sheet and Assignment.

JCS64 U.S. PTO  
09/667208  
09/21/00

| CLAIMS AS FILED                                   |           |           |         |           |
|---|-----------|-----------|---------|-----------|
| FOR   | NO. FILED | NO. EXTRA | RATE    | FEE       |
| Total Claims                                      | 23 - 20   | 3         | \$18.00 | \$ 54.00  |
| Independent Claims                                | 4 - 3     | 1         | \$78.00 | \$ 78.00  |
| Multiple Dependent Claims (if applicable) (\$260) |           |           |         | \$ .00    |
| Basic Filing Fee                                  |           |           |         | \$ 690.00 |
| Total Filing Fee                                  |           |           |         | \$ 822.00 |

- ( x ) The Assistant Commissioner is hereby authorized to charge payment of \$822 for the following filing fees associated with this communication or credit any overpayment to Deposit Account No. 07-0960 (GENERAL MOTORS CORPORATION). A duplicate copy of this sheet is enclosed.
- ( x ) Any additional filing fees required under 37 CFR § 1.16.
- ( x ) Any patent application processing fees under 37 CFR § 1.17.

Respectfully submitted,

By: Frank C. Nicholas  
 FRANK C. NICHOLAS  
 Registration No. (33,983)

Date: September 21, 2000

Correspondence Address:

ANTHONY LUKE SIMON  
 General Motors Corporation  
 Legal Staff  
 Mail Code 482-C23-B21  
 300 Renaissance Center  
 P.O. Box 300  
 Detroit, Michigan 48265-3000  
 Telephone: 313/665-4714

I hereby certify that this is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated below and is addressed to:

Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, D.C. 20231

By: Frank C. Nicholas

Typed Name: FRANK C. NICHOLAS

Express Mail Label No.: EL 449 846 786 US

Date of Deposit: September 21, 2000

"Express Mail" mailing label number: EL 449.846.786 US

Date of Deposit: September 21, 2000

PATENT  
(GM Dkt No.: GP300180)  
Case No. 2750/10

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
APPLICATION FOR UNITED STATES LETTERS PATENT**

INVENTORS: DONALD B. NAGY

TITLE: METHOD AND SYSTEM OF SIMULATING A  
COLD OR HOT START AUTOMOBILE  
EMISSIONS TEST

ATTORNEYS: ANTHONY LUKE SIMON  
General Motors Corporation  
Legal Staff  
Mail Code 482-C23-B21  
300 Renaissance Center  
P.O. Box 300  
Detroit, Michigan 48265-3000  
Telephone: 313/665-4714

## **METHOD AND SYSTEM OF SIMULATING A COLD OR HOT START AUTOMOBILE EMISSIONS TEST**

### **5    FIELD OF THE INVENTION**

The present invention relates to automotive emissions testing, and, more particularly, to a method and system of simulating a cold or hot start automobile emissions test.

### **10   BACKGROUND OF THE INVENTION**

In today's automotive climate, much attention has been drawn to the amount of emissions from the engines of automobiles. More specifically, there has been a greater push, not only within this country, but generally throughout the world, to reduce the amount of carbon monoxide (CO) and other undesirable emissions released into the atmosphere. A method by which to accurately measure the emissions of an automobile engine has accordingly become extremely important.

Most automakers have developed various ways of testing the emissions output of an automobile. To determine how accurately an emissions test site can measure an automobile's emissions, a classical diagnostic test used in the industry is to run a "cold start" automobile test, using correlation, or test, automobiles. One disadvantage with the "cold start" diagnostic testing technique has been the requirement that the automobile be cooled down to ambient levels after each test, such that another test may be run. This process is known as "soaking" the automobile. Typically, 12-24 hours of cool down time is needed between tests. This time period greatly effects how often these measurements, and correspondingly, the tests can be made. In addition, on low emissions automobiles, the automobile variability is often a significant problem in determining test accuracy.

Accordingly, it would be desirable to have a program and method that overcomes the above disadvantages.

### **SUMMARY OF THE INVENTION**

5           One aspect of the present invention provides for a method of  
simulating a cold start automobile emissions test. The automobile includes  
an emissions system. The emissions system includes an engine and at least  
one catalytic converter. The automobile is preconditioned. A first gaseous  
10   substance is injected into the emissions system of the automobile between  
the engine and the catalytic converter. The first gaseous substance is further  
injected into the emissions system of the automobile after the catalytic  
converter. The engine of the automobile is then started. Finally, a second  
gaseous substance is injected into the emissions system of the automobile.

          Another aspect of the present invention provides for a method of  
15   simulating a hot start automobile emissions test on an automobile. The  
automobile includes an emissions system. The emissions system includes an  
engine and at least one catalytic converter. The automobile is  
preconditioned. A first gaseous substance is injected into the emissions  
system of the automobile between the engine and the catalytic converter.  
20   The first gaseous substance is further injected into the emissions system of  
the automobile after the catalytic converter. The engine of the automobile is  
then started. A second gaseous substance is then injected into the emissions  
system of the automobile. Finally, a third gaseous substance is injected into  
the emission system.

25           Another aspect of the present invention provides a system for  
simulating a cold start automobile emissions test on an automobile. The  
automobile includes an emissions system. The emissions system includes an  
engine and at least one catalytic converter. A preconditioning means  
preconditions the automobile. A first injector injects a first gaseous substance

into the emissions system of the automobile between the engine and the catalytic converter. A second injector injects the first gaseous substance into the emissions system of the automobile downstream of the catalytic converter. A means for starting the engine of the automobile starts the engine. Finally, a third injector injects a second gaseous substance into the emissions system of the automobile.

Another aspect of the present invention provides a system for simulating a hot start automobile emissions test on an automobile. The automobile includes an emissions system. The emissions system includes an engine and at least one catalytic converter. A preconditioning means preconditions the automobile. A first injector injects a first gaseous substance into the emissions system of the automobile between the engine and the catalytic converter. A second injector injects the first gaseous substance into the emissions system of the automobile downstream of the catalytic converter. A means for starting the engine of the automobile starts the engine. A third injector injects a second gaseous substance into the emissions system of the automobile. Finally, a fourth injector injects a third gaseous substance into the emission system.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

**FIG. 1** is a flowchart illustrating one embodiment of a method of simulating a cold start automobile emissions test, made in accordance with the present invention;

**FIG. 2** is a flowchart illustrating one embodiment of a method of simulating a hot start automobile emissions test, made in accordance with the present invention; and

**FIG. 3** is a schematic diagram illustrating one embodiment of a system for simulating the automobile emissions tests of **FIGS. 1** and **2**, made in accordance with the present invention.

**DETAILED DESCRIPTION OF THE  
PRESENTLY PREFERRED EMBODIMENTS**

One embodiment of the present invention uses a “warmed-up” (or  
5 “hot”) automobile. The emissions of such an automobile are very low as a  
result of the heated catalytic converter. A known calibrated gas with high  
enough concentration, and for a predetermined length of time, is injected into  
the automobile’s exhaust system, at a point located downstream of the  
catalytic converter, to simulate cold start emission profiles. This calibrated  
10 gas is injected by using a computer-controlled mass flow controller, and  
added to the automobile’s normal (but lower) emission gases. Because the  
synthetic gas can be precisely injected, and because the gas represents a  
majority of the total measured emissions, a measurement of emissions at this  
point leads to a more accurate and more repeatable mass emission level.  
15 The normal emissions attributed to the engines combustion process are still  
there, at higher variability, but represent a fraction of the total automobiles  
exhaust emissions.

Another aspect of the present invention includes an exhaust pipe  
preconditioning feature. It is currently known that when an automobile is cold  
20 started, that because there is no carbon dioxide (CO<sub>2</sub>) in the tail pipe, large  
measurement errors may occur. Since the present invention simulates a cold  
start, there is a desire to duplicate this condition with the correlation  
automobile simulator. However, running emissions tests back to back, as  
provided for in the present invention, will leave CO<sub>2</sub> gas in the tail pipe  
25 system, and therefore will not truly simulate an actual cold start automobile  
test. Therefore, a key part of the present invention is to precondition the  
automobile’s tail pipe and exhaust collection system by injecting an inert gas  
to flush out the CO<sub>2</sub> from the tail pipe. As a result, the automobile will  
simulate a true cold start automobile even though the automobile just ran a

test and, consequently, has been heated. The flushing takes a short period of time, for example, just a few minutes, between the tests.

Another embodiment of the present invention simulates a "hot start" automobile emission test. In this simulation, the principle is the same, i.e., a  
5 known calibration gas is injected into the tail pipe while the automobile is running. However, in this embodiment, the concentration level of the calibration gas is much lower and varies more frequently to simulate the varying exhaust gas composition. Even though the concentration of this gas is much lower, it still is higher than the vehicle's exhaust gases and thereby  
10 provides improved accuracy with less variability.

In one embodiment of the present invention, a low emissions automobile is preconditioned. The process of preconditioning an automobile may occur by running the engine of the automobile until the engine of the automobile is thoroughly warmed-up. Alternatively, this process may take  
15 place in any manner which allows the engine of the automobile to warm up until low emissions are achieved. The engine of the automobile is then shut off. A first gas is injected into the emissions system of the automobile, both ahead or upstream of and behind or downstream the catalytic converter, to flush out all exhaust gases currently within the system. This process,  
20 however, will not significantly cool down the catalytic converter. The engine of the automobile is then restarted, and a high-level calibration gas is simultaneously injected into the emissions system. The injection of this high-level calibration gas will simulate a cold-start condition. Normally, this cold-start emission will take a short time, for example, 20 seconds, in duration for  
25 an accurate measurement to occur. After the expiration of this time, the simulator will inject a lower level calibration gas to simulate hot running and a low emissions automobile. This step may take many minutes in duration. Therefore, the simulator will have simulated both a cold-start and hot-start emissions test condition without the present-day requirement of soaking the  
30 automobile to return to cold start conditions. Furthermore, any combination of

injection location, timing, gas concentrations, gas composition and gas flow rate may be varied to simulate other automobile operating conditions.

The simulator of a preferred embodiment of the present invention results in a lower test variability because the automobile's lower level  
5 emission are precisely mixed with known high level calibration gases. As a result, the high variability of the exhaust emissions are averaged with the low variability of the injected gases, thereby providing lower overall variability. In addition, the simulator of the present invention accurately simulates a true cold start automobile test, including proper operation of the dynamometer.  
10 The simulator uses the automobile's exhaust gases as a carrier for the injected calibration gas, and includes important physical properties, such as, for example, heat, water, high flow rates and CO<sub>2</sub>. As a result of the high temperature of the automobile prior to the start of the simulator, the simulator may run repetitive back-to-back tests without the requirement of soaking the automobile. Finally, the simulator may also simulate a hot low-level  
15 emissions with lower variability.

Referring to **FIGS. 1** and **3**, which together illustrate a one embodiment of a system and method for simulating a cold start automobile emissions test. First, an automobile **22** is preconditioned (Block **100**). Generally, the process  
20 of preconditioning the automobile **22** serves to provide an automobile that is "hot" or "warmed." A hot automobile is an automobile that has been running for a predetermined period of time such that the temperature of the engine **10** is above its normal "resting" temperature. For purposes of the present invention, the resting temperature of the automobile **22** may be, for example,  
25 75°F. The purpose for this preconditioning step is to provide a simulated cold start test that can be applied to warmed automobiles without a required "soak time." The soak time is the period in which a hot automobile **22** must sit in order for the temperature of the engine **10** to return to the temperature of the surrounding air. Currently, this soak time runs anywhere from between 12-24



hours. The present invention thus provides a means for eliminating this time delay, and consequently, allows for repetitive back-to-back test simulations.

In detail, the preconditioning aspect of the present invention is as follows: first, the engine **10** of the automobile **22** is started. The engine **10**  
5 may be started by an automated computer controller **24**, known in the art, or by any other similar means of igniting the engine **10** of the automobile **22**. Second, the engine **10** of the automobile **22** is run for a predetermined period of time until the temperature of the engine **10** has reached a predetermined and stable level and temperature. This process may be performed by any  
10 known monitoring method, such as an automated computer controller **24**, which monitors the temperature of the engine **10**.

At this point, the engine **10** is thoroughly warmed up, and the automobile **22**, through the emissions system, is emitting a very low level of emissions. This is because the engine **10** and drivetrain are at a stable  
15 warmed-up condition and the catalytic converter **12** is at the required operating temperature to significantly reduce the automobile's exhaust emissions. In late model vehicles, most of the mass emissions normally occur during the first 20 seconds of operation after ignition. Thus, it is necessary, in a cold start test, to have adequate instruments in place to  
20 measure this initial 20-second "spike." Furthermore, as is explained below, the present invention must be structured so as to accurately measure this 20-second spike.

After the automobile **22** has been preconditioned, the engine **10** is shut off by the controller **24** (Block **200**), and a first gaseous substance **16** is  
25 injected into the emissions system of the automobile **22** (Block **300**). Preferably, the emissions system of the automobile **22** in the present invention comprises the engine **10** of the automobile **22**, at least one catalytic converter **12** and at least one muffler **14**. This emissions system is shown in detail in **FIG. 3**. An emissions system similar to the one described here is

generally known in the art, and may further include other elements in addition to those mentioned above.

The first gaseous substance **16** may be initially injected into the emissions system of the automobile **22** at two points of the emissions system.

- 5 First, the first gaseous substance **16** may be injected into the emissions system between the engine **10** and the catalytic converter **12**. Second, the first gaseous substance **16** may be injected into the emissions system of the automobile **22** after the catalytic converter **12**. As an alternative to the second injection point, the first gaseous substance **16** may be injected
- 10 between the catalytic converter **12** and the muffler **14**. In either case, a greater proportion of the first gaseous substance **16** is injected at the second point of entry (i.e., after the catalytic converter **12** or between the catalytic converter **12** and the muffler **14**) than at the first point of entry (i.e., between the engine **10** and the catalytic converter **12**). The first gaseous substance **16**
- 15 preferably comprises a known concentration of dry-treated pure air. Additionally, the first gaseous substance **16** may be warmed. In such a case, however, for purposes of the present invention, the first gaseous substance **16** is, in one embodiment, not as warm as the temperature of the catalytic converter **12**. The purpose for injecting the first gaseous substance **16** into
- 20 the emissions system of the automobile **22** is to flush out the current emissions that may be present within the emissions system. Although this can be done by letting the car "soak," as described above, since the purpose of the present invention is to simulate a cold start emissions test during hot conditions (i.e., when the engine **10** of the automobile **22** is warmed), the
- 25 injection of the first gaseous substance **16**, is used to flush out any present emissions from the emissions system. As a result, the next ignition of the engine **10** will provide a cold start simulation, in spite of the fact that the engine **10** of the automobile **22** is warmed.

The first gaseous substance **16**, which may be contained in a pressurized container, is preferably injected into the emission system of the automobile **22** by any known means of flow control, such as, for example, an injector or a plurality of solenoid valves **28**. The solenoid valve may be  
5 automatically controlled by the present invention through any known means, such as by a computer algorithm, or any other means in which the opening and closing of a valve may be controlled. For purposes of the present invention, the control of each of the solenoid valves **24** is by a plurality of automated flow control devices **26**. The automated flow control devices **26**  
10 may be controlled by the controller **24**.

Thus, the next step in the present invention is to re-start the engine **10** of the automobile **22** (Block **400**). The re-ignition of the engine **10** of the automobile **22** may be by the controller **24**. As a result of the injection of the first gaseous substance **16**, there are no emissions in the emissions system  
15 prior to this second start. A second gaseous substance **18** is then injected into the emissions system of the automobile (Block **500**). In one embodiment, this second gaseous substance **18** is injected into the emissions system after or downstream of the catalytic converter **12**. Alternatively, however, the second gaseous substance **18** may be injected before or upstream of the  
20 catalytic converter **12**. In any event, the injection of the second gaseous substance **18** into the emissions systems simulates a cold start of the engine **10** of the automobile **22**. This simulation occurs due to the makeup of the second gaseous substance **18**, along with the spike of emissions caused by the re-ignition of the engine **10** of the automobile **22**. The second gaseous  
25 substance **18** may be calibrated with a predetermined amount of hydrocarbons (HC) and carbon monoxide (CO). These gases are also represented in the emissions associated with a cold start of an automobile **22**, but at varying levels and, in some cases, levels too low to be accurately measured. By injecting a gaseous substance, containing a known (and high)  
30 level of these gases, into the emissions system, an accurate reading of these

gases may be taken, from which the amount of gases present in the engine  
10 of the automobile 22 at re-ignition may be determined by the controller 24.  
At this point, the simulator is simulating a cold start automobile emissions  
test. As a result, measurements of the composition of the exhaust air may be  
5 accurately taken at any point along the emissions system by the controller 24.

The second gaseous substance 18, which may be contained in a  
pressurized container, is preferably injected into the emission system of the  
automobile 22 by any known means of flow control, such as, for example, an  
injector or a plurality of solenoid valves 28. Preferably, the solenoid valve  
10 may be automatically controlled through any known means, such as by a  
computer algorithm, or any other means in which the opening and closing of a  
valve may be controlled. In one embodiment, the control of each of the  
solenoid valves 28 is by a plurality of automated flow control devices 26. The  
automated flow control devices 26 may be controlled by the controller 24.

15 **FIGS. 2 and 3** illustrate another embodiment of the present invention.  
Referring to **FIGS. 2 and 3**, a system and method of simulating a hot start  
automobile emissions test is provided. In a hot start automobile emissions  
test, the method is similar to that described above with reference to the cold  
start emissions test. However, after injecting the second gaseous substance  
20 18 into the emissions system (which, as stated above, provides for a  
simulated cold start), a third gaseous substance 20 may be injected into the  
emissions system after a predetermined time period (Block 600). The third  
gaseous substance 20, like the second gaseous substance 18, may be pre-  
calibrated to a known concentration of both HC and CO. However, unlike the  
25 second gaseous substance 18, the third gaseous substance 20 comprises a  
lower level of concentration of the two substances. The purpose for this is  
that, during a hot start emissions test, there is no 20-second spike of  
emissions as there is during a cold start emissions test. Rather, any  
emissions during a hot start emissions test would “trickle out” by comparison.

As a result, the existing need to measure this relative "trickle" may be satisfied by a lower concentration of the third gaseous substance **20**. The third gaseous substance **20** can then be measured to determine the current amounts of HC and CO in the emissions system of the automobile **22** during  
5 a simulated hot start of the engine **10**. Thus, at this point, the simulator is simulating a hot start automobile emissions test. As a result, measurements of the composition of the exhaust air may be accurately taken at any point along the emissions system of the automobile **22** by the controller **24**.

The third gaseous substance **20**, which may be contained in a  
10 pressurized container, is preferably injected into the emission system of the automobile **22** by any known means of flow control, such as, for example, an injector or a plurality of solenoid valves **28**. Preferably, the solenoid valve may be automatically controlled by the present invention through any known means, such as by a computer algorithm, or any other means in which the  
15 opening and closing of a valve may be controlled. In one embodiment, the control of each of the solenoid valves **24** is by a plurality of automated flow control devices **26**. The automated flow control devices **26** may be controlled by the controller **24**.

It should be appreciated that the embodiments described above are to  
20 be considered in all respects only illustrative and not restrictive. The scope of the invention is indicated by the following claims rather than by the foregoing description. All changes that come within the meaning and range of equivalents are to be embraced within their scope.

WE CLAIM:

1. A method of simulating a cold start automobile emissions test, comprising the steps of:

5 preconditioning an automobile, the automobile including an emissions system, the emissions system including an engine and at least one catalytic converter;

injecting a first gaseous substance into the emissions system between the engine and each of the catalytic converters;

10 injecting the first gaseous substance into the emissions system after each of the catalytic converters;

starting the automobile; and

injecting a second gaseous substance into the emissions system.

15

2. The method of Claim 1, wherein the preconditioning step comprises the following steps:

starting the automobile;

operating the automobile until the temperature of the automobile

20 has reached a predetermined temperature and a predetermined level of emissions has been achieved; and

turning the automobile off.

3. The method of Claim 1, wherein the second gaseous substance  
25 is injected into the emissions system after each of the catalytic converters.

4. The method of Claim 1, wherein a greater proportion of the first gaseous substance is injected after each of the catalytic converters than is injected between the engine and each of the catalytic converters.

30

5. The method of Claim 2, wherein the first gaseous substance is heated to a temperature not greater than the predetermined temperature.

6. The method of Claim 1, wherein the emissions system further includes at least one muffler; and further comprising the step of:  
injecting the first gaseous substance into the emissions system between each of the catalytic converters and each of the mufflers.

7. The method of Claim 1, wherein the first gaseous substance comprises pure air.

8. The method of Claim 1, wherein the second gaseous substance comprises hydrocarbons and carbon monoxide.

9. A method of simulating a hot start automobile emissions test, comprising the steps of:  
preconditioning an automobile, the automobile including an emissions system, the emissions system including an engine and at least one catalytic converter;  
injecting a first gaseous substance into the emissions system between the engine and each of the catalytic converters;  
injecting the first gaseous substance into the emissions system after each of the catalytic converters;  
starting the automobile;  
injecting a second gaseous substance into the emissions system; and  
injecting a third gaseous substance into the emissions system.

10. The method of Claim 9, wherein the preconditioning step comprises the following steps:

- starting the automobile;
- 5 operating the automobile until the temperature of the automobile has reached a predetermined temperature and a predetermined level of emissions has been achieved; and
- turning the automobile off.

10 11. The method of Claim 9, wherein the second gaseous substance is injected into the emissions system after each of the catalytic converters.

12. The method of Claim 9, wherein the third gaseous substance is injected into the emissions system after each of the catalytic converters.

15 13. The method of Claim 9, wherein a greater proportion of the first gaseous substance is injected after each of the catalytic converters than is injected between the engine and each of the catalytic converters.

20 14. The method of Claim 10, wherein the first gaseous substance is heated to a temperature not greater than the predetermined temperature.

15. The method of Claim 9, wherein the emissions system further includes at least one muffler; and further comprising the step of:

25 injecting the first gaseous substance into the emissions system between each of the catalytic converters and each of the mufflers.

16. The method of Claim 9, wherein the first gaseous substance comprises pure air.

30



17. The method of Claim 9, wherein the second gaseous substance comprises a hydrocarbons and carbon monoxide.

5 18. The method of Claim 9, wherein the third gaseous substance comprises hydrocarbons and carbon monoxide.

19. The method of Claim 18, wherein the third gaseous substance contains less comprises a lower concentration of hydrocarbons and carbon  
10 monoxide than the second gaseous substance.

20. A system for simulating a cold start automobile emissions test, comprising:

preconditioning means that preconditions an automobile, the  
15 automobile including an emissions system, the emissions system including an engine and at least one catalytic converter;

first injecting means that injects a first gaseous substance into the emissions system between the engine and each of the catalytic  
converters;

20 second injecting means that injects the first gaseous substance into the emissions system after each of the catalytic converters;

starting means that starts the automobile; and

third injecting means that injects a second gaseous substance into the emissions system.

25

21. The system of Claim 20, wherein the preconditioning step comprises:

- starting means that starts the automobile;
- 5 operating means that operates the automobile until the temperature of the automobile has reached a predetermined temperature and a predetermined level of emissions has been achieved; and
- ending means that turns the automobile off.

10 22. A system for simulating a hot start automobile emissions test, comprising:

- preconditioning means that preconditions an automobile, the automobile including an emissions system, the emissions system including an engine and at least one catalytic converter;
- 15 first injecting means that injects a first gaseous substance into the emissions system between the engine and each of the catalytic converters;
- second injecting means that injects the first gaseous substance into the emissions system after each of the catalytic converters;
- 20 starting means that starts the automobile;
- third injecting means that injects a second gaseous substance into the emissions system; and
- fourth injecting means that injects a third gaseous substance into the emissions system.

25

23. The system of Claim 22, wherein the preconditioning step comprises:

- starting means that starts the automobile;
- 5        operating means that operates the automobile until the temperature of the automobile has reached a predetermined temperature and a predetermined level of emissions has been achieved; and
- ending means that turns the automobile off.

**ABSTRACT OF THE DISCLOSURE**

5 A method of simulating a cold start automobile emissions test on an automobile is provided. The automobile includes an emissions system. The emissions system includes an engine and at least one catalytic converter. The automobile is preconditioned. A first gaseous substance is injected into the emissions system of the automobile between the engine and the catalytic converter. The first gaseous substance is further injected into the emissions  
10 system of the automobile after the catalytic converter. The engine of the automobile is then started. Finally, a second gaseous substance is injected into the emissions system of the automobile.

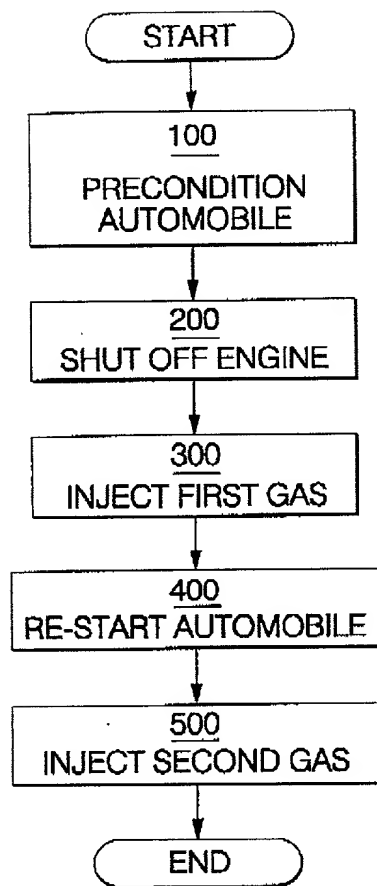


FIG. 1

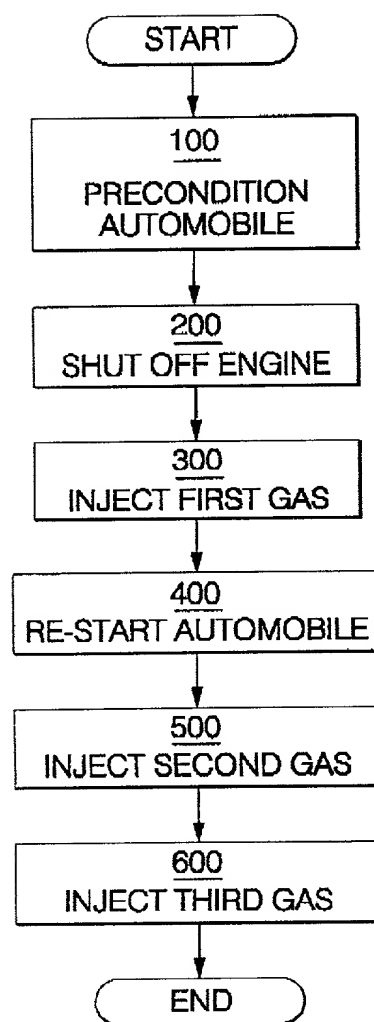


FIG. 2



**DECLARATION  
and  
DESIGNATION OF CORRESPONDENCE ADDRESS**

As an inventor named below, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought in the specification GP-300180 entitled

**METHOD AND SYSTEM OF SIMULATING A COLD OR HOT  
START AUTOMOBILE EMISSIONS TEST**

I have reviewed and understand the contents of the above-identified specification including the claims, as amended by any amendment referred to in this Declaration.


I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in title 37 Code of Federal Regulations, Section 1.56.

I further declare that all statements made above of my own knowledge are true, that all statements made above on information and belief are believed to be true, and that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under title 18 United States Code, Section 1001 and may jeopardize the validity of the application or any patent issuing thereon.

Address all communications to: ANTHONY LUKE SIMON  
General Motors Corporation  
Legal Staff  
Mail Code 482-C23-B21  
300 Renaissance Center  
P.O. Box 300  
Detroit, Michigan 48265-3000

Telephone: 313/665-4714

Inventor's signature

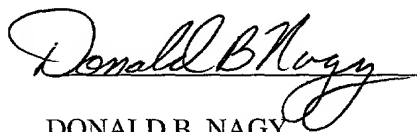

Date

Sept 7, 2000

Full name:

DONALD B. NAGY

Citizenship: US

Residence:

Canton, Michigan

Post office address:

44138 Tudor Court  
Canton, Michigan 48187